

HP-Tech GmbH

Maria Buch 4a/2
8750 Maria Buch
Austria



ZP25M14F


Type: gear pump



Specifications

Medium: Kerosene, Diesel	max. ambient temperature: 50 °C
Nominal pressure: 3,5 bar	max. pressure: 4 bar
Nominal flowrate: 190 ml/min	
Nominal voltage: 6 V	Nominal current: 0,8 A
	max. current: 1,5 A
total pump efficiency: 23 %	duty type: S2-10min
EMI filter: YES	EMI filter type: EF250

Characteristic

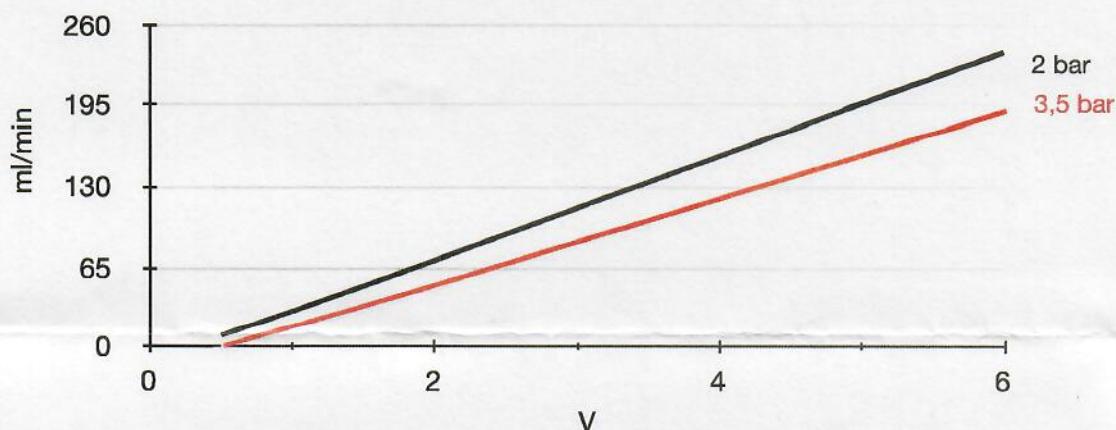

Mechanical basic data

Diameter: 20 mm	suction line: connection nipple 3mm
Length: 46 mm	pressure line: connection nipple 3mm
Weight: 39 g	
Special feature: magnetic coupled	

The pumps are designed for modeling typical short-time duty.
Due to environmental conditions are the values only guideline values.