

HP-Tech GmbH

Maria Buch 4a/2
8750 Maria Buch
Austria



ZP30020SF


Type: gear pump



Specifications

Medium: Kerosene, Diesel	max. ambient temperature: 50 °C
Nominal pressure: 5 bar	max. pressure: 6 bar
Nominal flowrate: 650 ml/min	
Nominal voltage: 4 V	Nominal current: 5,5 A
	max. current: 6 A
total pump efficiency: 27 %	duty type: S2-10min
interference filter: YES	interference filter type: EF300

Characteristic

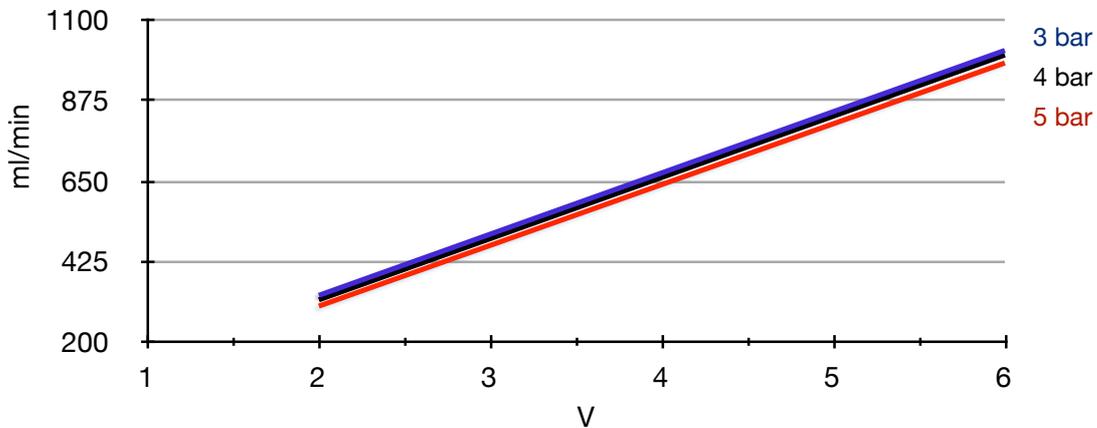

Mechanical basic data

Diameter: 24 mm	suction line: connection nipple 5mm
Length: 46 mm	pressure line: connection nipple 4mm
Weight: 64 g	

The pumps are designed for modeling typical short-time duty.
Due to environmental conditions are the values only guideline values.