

HP-Tech GmbH

Maria Buch 4a/2
8750 Maria Buch
Austria



ZP30725F


Type: gear pump



Specifications

Medium: Kerosene, Diesel	max. ambient temperature: 50 °C
Nominal pressure: 4 bar	max. pressure: 5 bar
Nominal flowrate: 540 ml/min	
Nominal voltage: 7,2 V	Nominal current: 2 A
	max. current: 2 A
total pump efficiency: 27 % Text	duty type: S2-10min
interference filter: YES	interference filter type: EF300

Characteristic

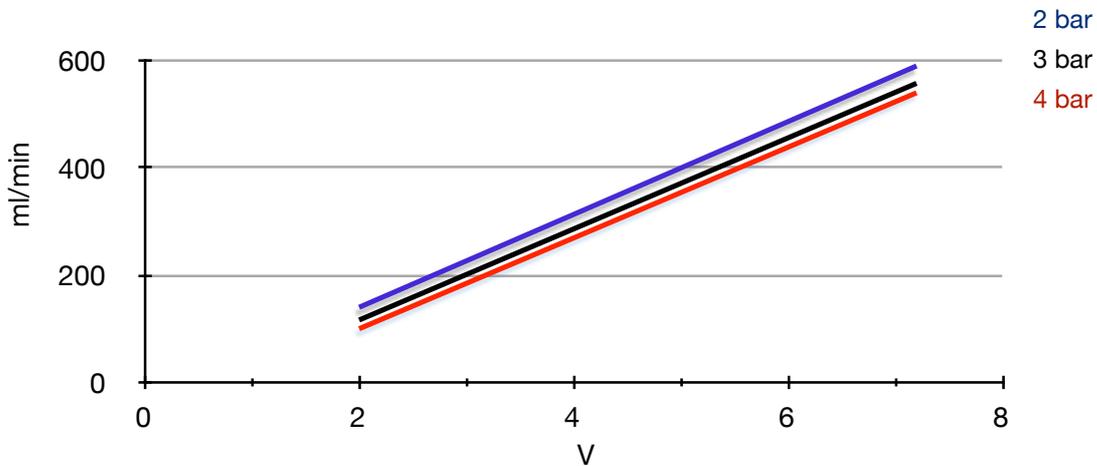

Mechanical basic data

Diameter: 24 mm	suction line: connection nipple 4mm
Length: 46 mm	pressure line: connection nipple 4mm
Weight: 64 g	

The pumps are designed for modeling typical short-time duty.
Due to environmental conditions are the values only guideline values.