

OV-BZP25L54-08

BLDC gear pump




symbol picture

Specifications

medium:	Kerosin, Diesel	ambient temperature.:	50 °C
operating pressure:	6 bar	max. pressure:	10 bar
flow rate:	1200 ml/min	max. current:	8 A
nominal voltage:	7 V	nominal current:	5,2 A
efficiency:	34 %	duty:	S1
Motor Controller:	HP-Control	gating signal:	selectable

Characteristic

Characteristic at 7,0V

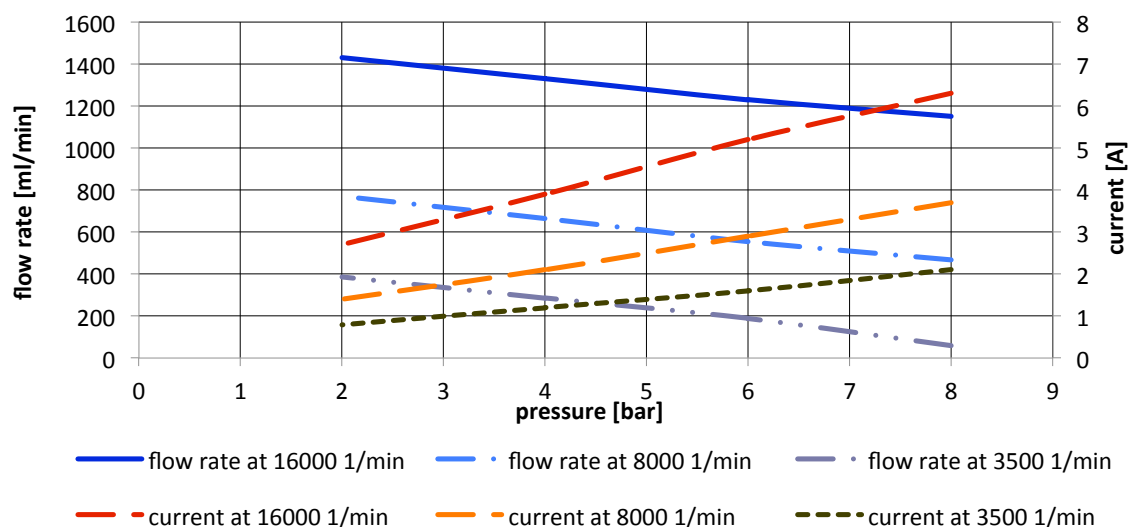

Mechanical data

external diameter:	25 mm	intake connection:	M5 thread
length:	65 mm	pressure connection:	M5 thread
weight:	100 g		